


## Product Overview

- Thread : Metric (M), PG, NPT
- Material : UL approved Nylon PA66
  - Flammability UL 94V-2 for A,C,E Parts,
  - Flammability UL 94V-0 EPDM Rubber for B, D Parts.
  - Also Accept to make super rubber : Resist high temperature rubber, resist strong acid/alkali etc.
- Protection Degree : IP68
- Working Temperature : -40°C to 100°C
- Features : The claws and seals of excellent design, sealing nut have a "Click" sound and re-open
- Can hold cable firmly a wider cable range. Resistance to salt water, weak acid, alcohol, oil, grease and common solvency.
- Colours : Black (RAL9005), Gray (RAL7035), other color available upon request.

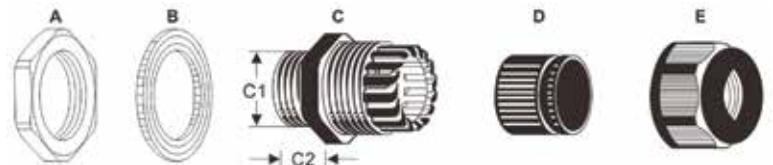

\*\*TPE-PG7-BK = Black = BK\*\*

\*\*TPE-PG7-LG = Gray = LG\*\*

### PG TYPE

Product Model	Cable Range	Thread (O.D.) (C1)	Thread Length (C2)	Spanner Size	Qty / Bag
TPE-PG7	3-6.5	12.5	8.0	16.0	100
TPE-PG9	4-8	15.2	8.0	19.0	100
TPE-PG11	5-10	18.6	8.0	22.0	100
TPE-PG13.5	6-11	20.4	10.0	24.0	100
TPE-PG16	10-13	22.5	10.0	27.0	100
TPE-PG21	13-18	28.3	10.0	33.0	100
TPE-PG29	18-25	37.0	12.0	42.0	50
TPE-PG36	22-32	47.0	14.0	52.0	20
TPE-PG42	32-38	54.0	14.0	60.0	20
TPE-PG48	37-44	59.3	15.0	64.0	20
TPE-PG63	42-50	71.0	28.0	77.0	10

### M TYPE

Product Model	Cable Range	Thread (O.D.) (C1)	Thread Length (C2)	Spanner Size	Qty / Bag
TPE-M12x1.5	3-6.5	12.0	8.0	16.0	100
TPE-M16x1.5	4-8	16.0	9.0	19.0	100
TPE-M20x1.5	6-11	20.0	10.0	24.0	100
TPE-M22x1.5	10-13	22.0	10.0	27.0	100
TPE-M24x1.5	12-15	24.0	12.0	28.0	100
TPE-M25x1.5	13-18	25.0	15.0	28.0	100
TPE-M27x1.5	13-18	27.0	15.0	33.0	100
TPE-M28x1.5	13-18	28.0	15.0	33.0	100
TPE-M30x1.5	16-21	30.0	15.0	35.0	50
TPE-M32x1.5	16-21	32.0	15.0	35.0	50
TPE-M36x1.5	18-25	36.0	15.0	52.0	50
TPE-M40x1.5	22-32	40.0	15.0	58.0	20
TPE-M50x1.5	32-38	50.0	18.0	64.0	20
TPE-M63x1.5	37-44	63.0	18.0	81.0	20
TPE-M72x2.0	42-50	72.0	30.0	81.0	10

### NPT TYPE

Product Model	Cable Range	Thread (O.D.) (C1)	Thread Length (C2)	Spanner Size	Qty / Bag
TPE-NPT3/8"	4-8	17.0	8.0	18.0	100
TPE-NPT1/2"	6-12	21.2	8.0	22.0	100
TPE-NPT3/4"	13-18	26.5	9.0	30.0	50
TPE-NPT1"	18-25	33.2	11.0	40.0	20
TPE-NPT1-1/4"	22-32	41.9	13.0	50.0	10
TPE-NPT1-1/2"	30-38	48.0	14.0	57.0	10
TPE-NPT2"	37-44	60.0	14.0	65.0	5
TPE-NPT2-1/2"	42-52	72.6	15.0	77.0	5
TPE-NPT3"	65-70	87.8	15.0	94.0	5