



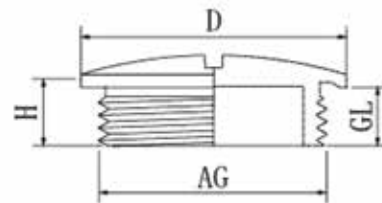

Product Overview

- Material : Brass with nickel plated
- Ambient Temperature : -40°C to 100°C, Temporary to 120°C
- Protection Degree : IP68
- Application : To close unused cable gland entries and normal integrity of the equipment
- Accessories : Locknut, Sealing washer.
- Remark :
If you need *Hexagonal Series* Please Specify *H* at the end
** TPE-SC-M20-H**

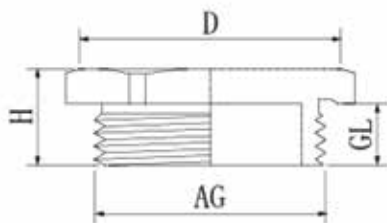

PG TYPE

Product Model	Thread	AG (mm.)	D (mm.)	GL (mm.)	Spanner Size	Qty / Bag
TPE-SC-PG7	PG7	12.5	14.0	8.0	14.0	100
TPE-SC-PG9	PG9	15.2	17.0	9.0	17.0	100
TPE-SC-PG11	PG11	18.6	21.0	9.0	21.0	100
TPE-SC-PG13.5	PG13.5	20.4	23.0	10.0	23.0	100
TPE-SC-PG16	PG16	22.5	25.0	10.0	25.0	100
TPE-SC-PG21	PG21	28.3	31.0	11.0	31.0	50
TPE-SC-PG29	PG29	37.0	40.0	12.0	40.0	20
TPE-SC-PG36	PG36	47.0	50.0	15.0	50.0	10
TPE-SC-PG42	PG42	54.0	57.0	16.0	57.0	10
TPE-SC-PG48	PG48	59.3	64.0	16.0	64.0	10

M TYPE

Product Model	Thread	AG (mm.)	D (mm.)	GL (mm.)	Spanner Size	Qty / Bag
TPE-SC-M8	M8x1.0	8.0	12.0	8.0	12.0	100
TPE-SC-M10	M10x1.0	10.0	12.0	8.0	12.0	100
TPE-SC-M12	M12x1.5	12.0	14.0	8.0	14.0	100
TPE-SC-M16	M16x1.5	16.0	18.0	9.0	18.0	100
TPE-SC-M20	M20x1.5	20.0	23.0	10.0	23.0	100
TPE-SC-M25	M25x1.5	25.0	28.0	10.0	28.0	100
TPE-SC-M32	M32x1.5	32.0	35.0	12.0	35.0	50
TPE-SC-M40	M40x1.5	40.0	44.0	15.0	44.0	20
TPE-SC-M50	M50x1.5	50.0	54.0	16.0	54.0	20
TPE-SC-M63	M63x1.5	63.0	67.0	16.0	67.0	10
TPE-SC-M72	M72x2.0	72.0	78.0	16.0	78.0	10

NPT TYPE

Product Model	Thread	AG (mm.)	D (mm.)	GL (mm.)	Spanner Size	Qty / Bag
Can Made to Order						