



## Product Overview

- Material : PA Nylon, UL 94V-2
- Ambient Temperature : -40°C to 100°C, Temporary to 120°C
- Characteristics : Close the hole that is not in use.
- Application : Used to close to prevent dust or water against unused holes. and equipment having close threads.
- Accessories : Locknut, Sealing washer.
- Color : Black(RAL9005) / White Gray(RAL9018)
- Approvals : CE, RoHS



\*\*TPE-SC-PG7-BK = BK = Black\*\*

\*\*TPE-SC-PG7-LG = LG = LG\*\*

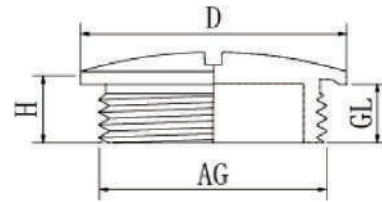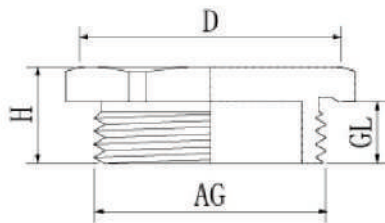

### PG TYPE

Product Model	Thread	AG (mm.)	GL (mm.)	Body Size	Spanner Size	Qty / Bag
TPE-SC-PG7	PG7	12.5	8.5	12.5	15.0	100
TPE-SC-PG9	PG9	15.2	8.5	13.0	19.0	100
TPE-SC-PG11	PG11	18.6	9.0	13.0	22.0	100
TPE-SC-PG13.5	PG13.5	20.4	9.0	13.0	25.0	100
TPE-SC-PG16	PG16	22.5	10.5	15.0	27.0	100
TPE-SC-PG21	PG21	28.3	10.5	15.5	33.0	100
TPE-SC-PG29	PG29	37.0	11.5	16.0	44.0	50
TPE-SC-PG36	PG36	47.0	13.5	18.0	55.0	50
TPE-SC-PG42	PG42	54.0	13.5	18.5	62.0	20
TPE-SC-PG48	PG48	59.3	14.5	19.5	68.0	20

### M TYPE

Product Model	Thread	AG (mm.)	GL (mm.)	Body Size	Spanner Size	Qty / Bag
TPE-SC-M12x1.5	M12x1.5	12.0	8.5	12.5	15.0	100
TPE-SC-M16x1.5	M16x1.5	16.0	8.5	13.0	19.0	100
TPE-SC-M18x1.5	M18x1.5	18.0	9.0	13.0	22.0	100
TPE-SC-M20x1.5	M20x1.5	20.0	9.0	13.0	25.0	100
TPE-SC-M22x1.5	M22x1.5	22.0	10.5	15.0	27.0	100
TPE-SC-M25x1.5	M25x1.5	25.0	10.5	15.5	29.0	100
TPE-SC-M32x1.5	M32x1.5	32.0	10.5	16.0	38.0	50
TPE-SC-M40x1.5	M40x1.5	40.0	11.5	18.0	46.0	50
TPE-SC-M50x1.5	M50x1.5	50.0	13.5	18.0	56.0	20
TPE-SC-M63x1.5	M63x1.5	63.0	14.0	19.0	68.0	20